


PuTTY Configuration

A brief instruction to configure Putty for the Atmel microprocessor board


1. Open *Device Manager* in order to find out the COM port of the *XPLAINED Virtual Com Port*.




2. Open *PuTTY* and select *Serial* in the Category window.

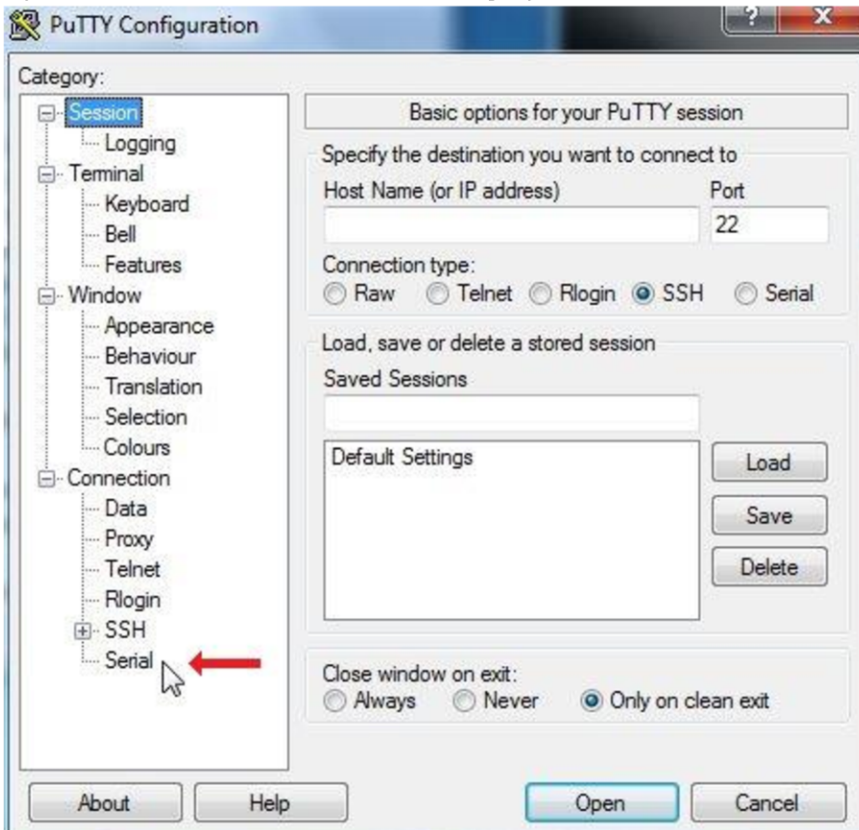

3. Select the appropriate serial line and configure it as shown below.

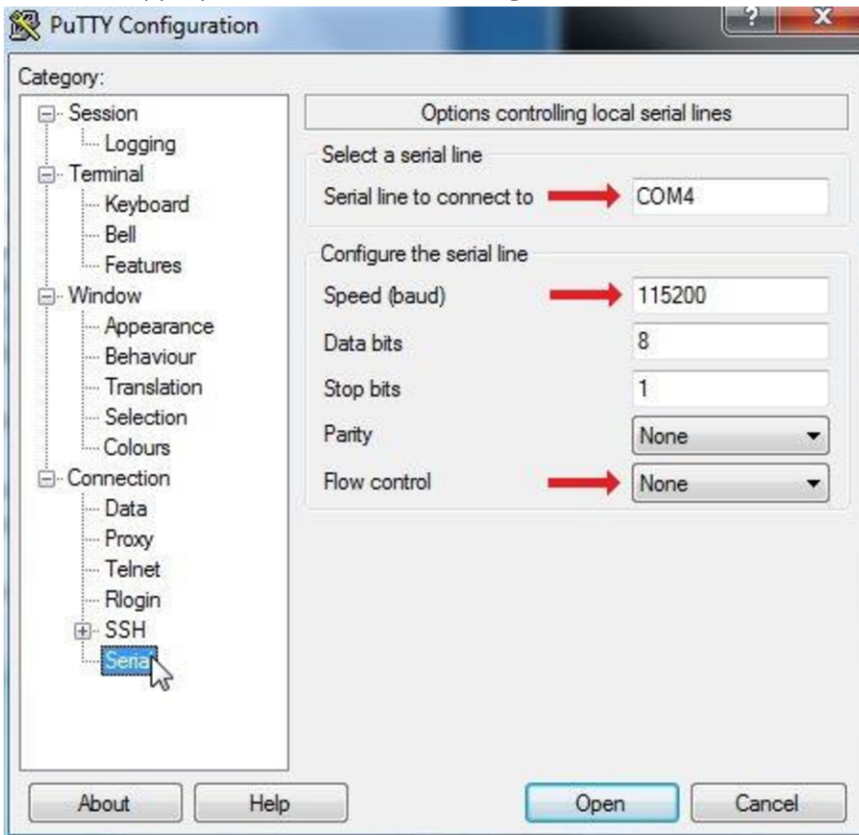

4. Return to *Session* in the Category window and specify *Serial* as destination to connect.

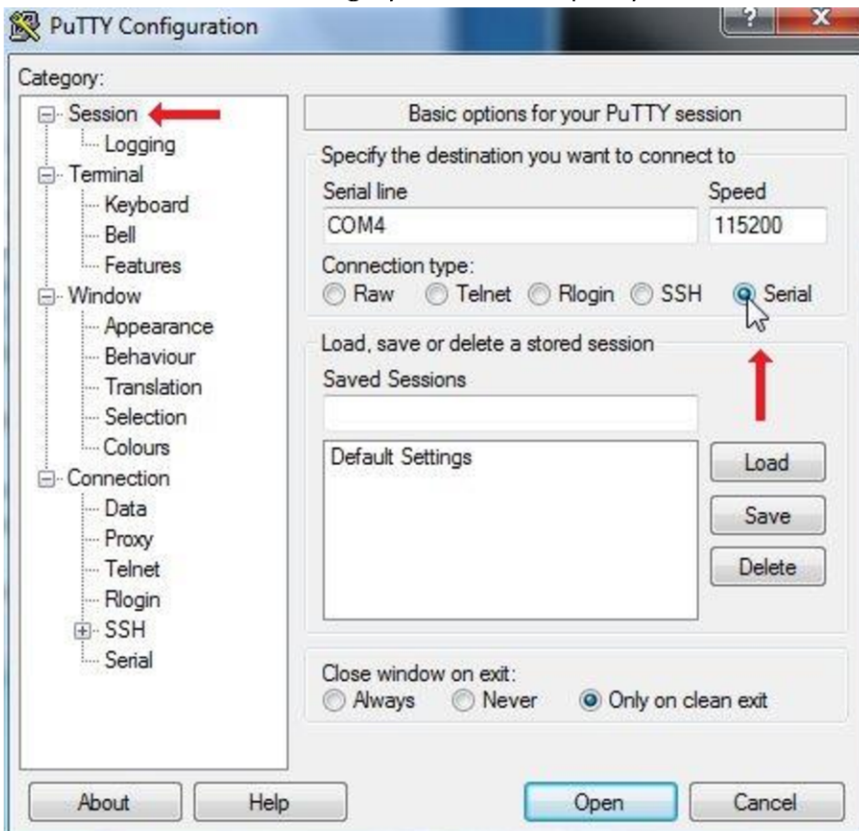

5. Click *Open* to connect to the Atmel microprocessor board.

