

Logical Operators


Networks and Embedded Systems

First Grade Level

Wolfgang Neff

Boolean Algebra (1)

- George Boole
 - British mathematician and philosopher
 - Mathematical foundation of computer science

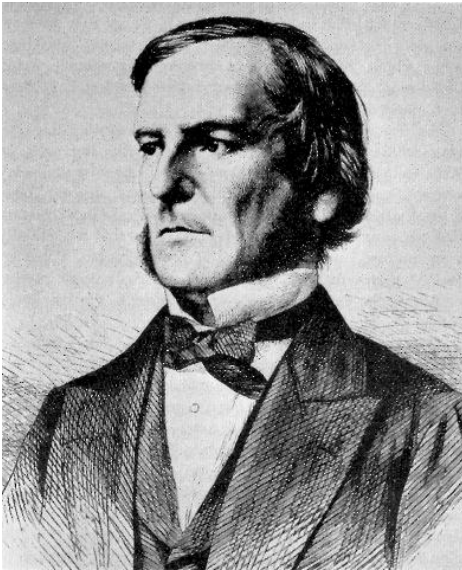

- * 2 Nov 1815 in England
- † 8 Dec 1864 in Ireland

Boolean Algebra (2)

- Calculating with Truth

- True \rightarrow 1

- False \rightarrow 0

Something that can be true or false.
Calculating with truth is difficult.

$$1+1 = 2$$

$$0-1 = -1$$

$$1 \div 0 = \perp$$



A new kind of
mathematics
is necessary

Logical Operators (1)

- Operate on logical values
 - True/False, On/Off, High/Low, 1/0
- Alternative terms
 - Logical operator
 - Logical connective
 - Boolean operator
 - Logical value
 - Truth value
 - Boolean value




Logical Operators (2)

- Negation

- Symbol: \neg (NOT, sometimes $\neg A \rightarrow \bar{A}$)
- Meaning: logical not (contrary of ...)
- Definition:

a	$\neg a$
0	1
1	0

Truth Table

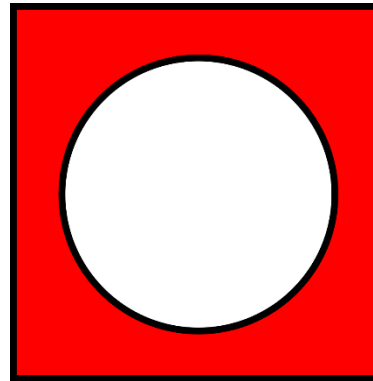

Venn diagram

Logical Operators (3)


- Conjunction

- Symbol: \wedge (AND)

- Meaning: logical and (both must be true)

- Definition:

- | a | b | $a \wedge b$ |
|---|---|--------------|
| 0 | 0 | 0 |
| 0 | 1 | 0 |
| 1 | 0 | 0 |
| 1 | 1 | 1 |

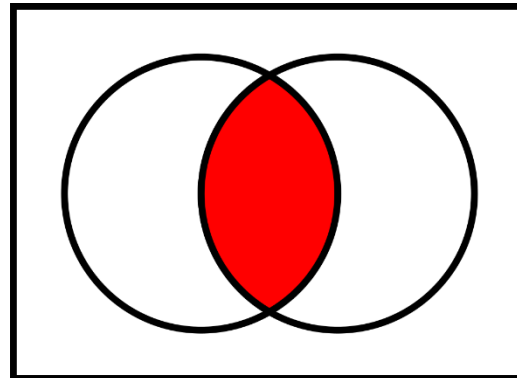

Logical Operators (4)


- Disjunction

- Symbol: \vee (OR)

- Meaning: logical or (at least one must be true)

- Definition:

- | a | b | $a \vee b$ |
|---|---|------------|
| 0 | 0 | 0 |
| 0 | 1 | 1 |
| 1 | 0 | 1 |
| 1 | 1 | 1 |

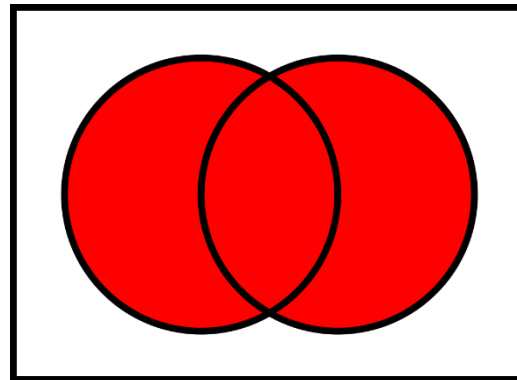

Logical Operators (5)

- Antivalence


- Symbol: \oplus (XOR, also \leftrightarrow or $\underline{\vee}$)

- Meaning: exclusive OR (one but not both must be true)

- Definition:

- | a | b | $a \oplus b$ |
|---|---|--------------|
| 0 | 0 | 0 |
| 0 | 1 | 1 |
| 1 | 0 | 1 |
| 1 | 1 | 0 |

Not equivalent
(not equal)

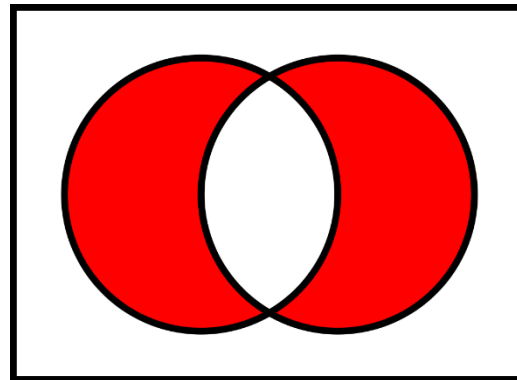

Logical Operators (6)

- Alternative Denial (Sheffer stroke)


- Symbol: $|$ (NAND, also \uparrow or $\bar{\wedge}$)

There is no alternative

- Meaning: negation of AND (at least one must be false)

- Definition:

- | a | b | a b |
|---|---|-----|
| 0 | 0 | 1 |
| 0 | 1 | 1 |
| 1 | 0 | 1 |
| 1 | 1 | 0 |

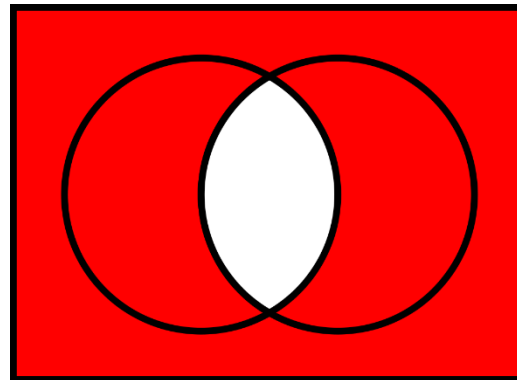

Logical Operators (7)

- Joint Denial (Peirce arrow)


- Symbol: \downarrow (NOR, also $\bar{\vee}$)

Nothing is true

- Meaning: negation of OR (both must be false)

- Definition:

- | a | b | $a \downarrow b$ |
|---|---|------------------|
| 0 | 0 | 1 |
| 0 | 1 | 0 |
| 1 | 0 | 0 |
| 1 | 1 | 0 |

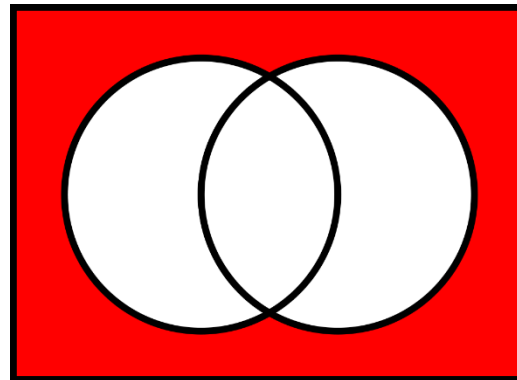

Laws of Logic (1)

- Double Negation
 - It is not true that it is not true
 - It is true
 - Expressed as a formula
 - $\neg(\neg a) \leftrightarrow a$
 - Proof

a	$\neg a$	$\neg\neg a$
0	1	0
1	0	1



$$a \leftrightarrow \neg\neg a$$

Laws of Logic (2)

- De Morgan's Law
 - Negation of parentheses
 - Not (A and B) *is equal to* not A or not B
 - Not (A or B) *is equal to* not A and not B
 - Expressed as a formulas
 - $\neg(a \wedge b) \leftrightarrow \neg a \vee \neg b$
 - $\neg(a \vee b) \leftrightarrow \neg a \wedge \neg b$

Laws of Logic (3)

- De Morgan's Law (continued)

- Example

- All numbers not between 1 and 5

- $\neg(n \geq 1 \wedge n \leq 5) \rightarrow \neg(n \geq 1) \vee \neg(n \leq 5) \rightarrow n < 1 \vee n > 5 \rightarrow \dots, -1, 0, 6, 7, \dots$
- $\neg(n \geq 1 \wedge n \leq 5) \rightarrow n \leq 1 \wedge n \geq 5 \rightarrow \emptyset \rightarrow$ there are no such numbers

Keep in Mind!
It's Important



NAND Form

- Complete set of logical operators
 - NOT, AND, OR
 - NAND (or NOR)
 - Just one operator (and easy to realize on silicon)
- Transformation
 - $\neg A \rightarrow A|A$
 - $A \wedge B \rightarrow (A|B)|(A|B)$
 - $A \vee B \rightarrow (A|A)|(B|B)$

