

# Minimization

Mechanical and Electrical Engineering

Second Grade Level

by Wolfgang Neff

# Minimization (1)

- Truth functions often are very complex
- Minimisation tries to simplify them
- There are several algorithms
  - Karnaugh maps
    - Very descriptive
    - Works only well up to four variables
  - Quine-McCluskey algorithm
    - For more variables
    - Complex and less descriptive

# Minimization (2)

- Instruction
  - Get the truth table
  - Make the corresponding Karnaugh map
  - Fill in the Karnaugh terms
  - Find blocks of powers of two (2, 4, 8, ...)
  - Drop variables which are in two regions

# Truth Table (1)


- Get the Truth Table
  - Analyze the problem
  - Find the number of occasions out
  - Find the power of 2 that gives enough occasions
  - Create the corresponding truth table
  - Encode the occasions
  - Determine the result for each line
  - Often there are several possible implementations

# Truth Table (2)

- Example: Which face of a dice has even pips?
  - A dice has 6 faces
    - We have 6 occasions
  - An exponent of 3 is enough for 6 occasions
    - We need 3 parameters ( $2^2 = 4 \leq 6 \leq 2^3 = 8$ )
    - Our circuit has 3 input lines
  - Encoding of the occasions
    - 1 pip  $\rightarrow$  1, 2 pips  $\rightarrow$  2 etc.
  - 1 indicates an even number of pips

# Truth Table (3)

- Example: even pips (continued)

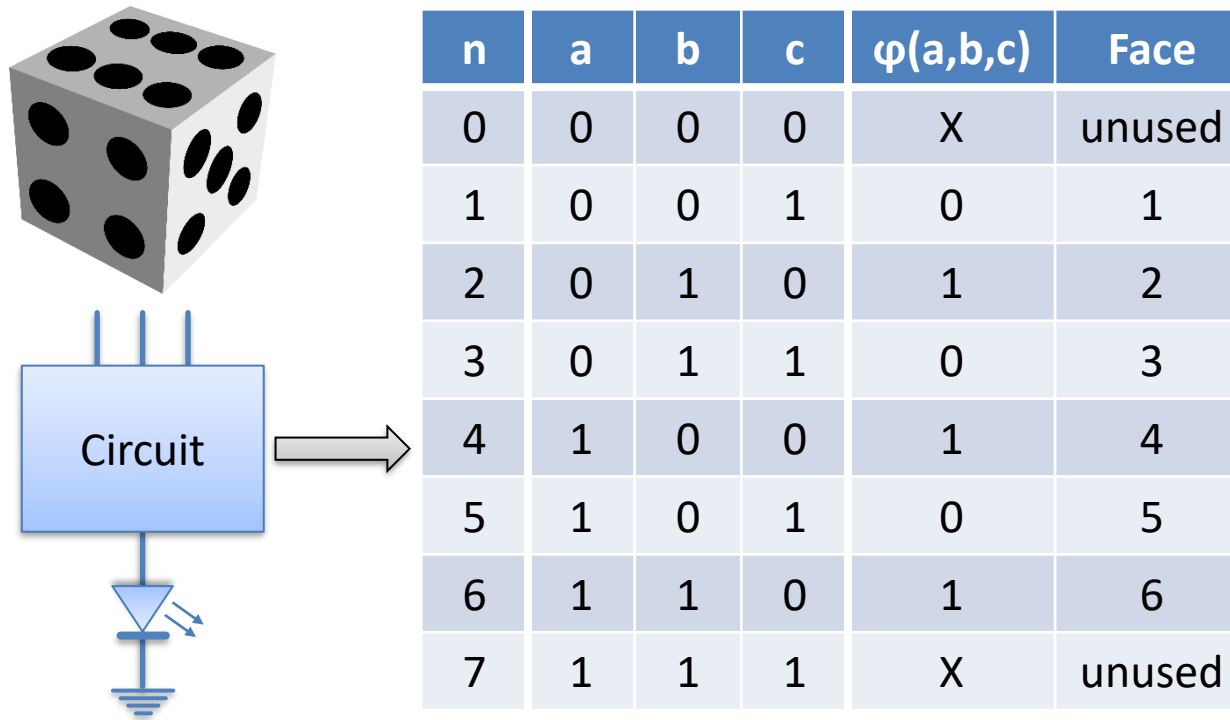

# Karnaugh Maps (1)

- Two variables

		a	
	$\neg a \wedge \neg b$	$a \wedge \neg b$	
	$\neg a \wedge b$	$a \wedge b$	b

- Three variables

			a		
	$\neg a \wedge \neg b \wedge \neg c$	$\neg a \wedge \neg b \wedge c$	$a \wedge \neg b \wedge c$	$a \wedge \neg b \wedge \neg c$	
	$\neg a \wedge b \wedge \neg c$	$\neg a \wedge b \wedge c$	$a \wedge b \wedge c$	$a \wedge b \wedge \neg c$	b
		c			

# Karnaugh Maps (2)

- Four variables

			a	
	$\neg a \wedge \neg b \wedge \neg c \wedge \neg d$	$\neg a \wedge \neg b \wedge c \wedge \neg d$	$a \wedge \neg b \wedge c \wedge \neg d$	$a \wedge \neg b \wedge \neg c \wedge \neg d$
d	$\neg a \wedge \neg b \wedge \neg c \wedge d$	$\neg a \wedge \neg b \wedge c \wedge d$	$a \wedge \neg b \wedge c \wedge d$	$a \wedge \neg b \wedge \neg c \wedge d$
	$\neg a \wedge b \wedge \neg c \wedge d$	$\neg a \wedge b \wedge c \wedge d$	$a \wedge b \wedge c \wedge d$	$a \wedge b \wedge \neg c \wedge d$
	$\neg a \wedge b \wedge \neg c \wedge \neg d$	$\neg a \wedge b \wedge c \wedge \neg d$	$a \wedge b \wedge c \wedge \neg d$	$a \wedge b \wedge \neg c \wedge \neg d$
			c	
				b



# Karnaugh Terms (1)

- Minterms
  - Rows with a result of 1
  - All variables connected by conjunctions
    - Negate variable if they are 0
  - Mark minterms in the map with 1
- Don't-care terms
  - Rows with a result of X
  - Mark don't-care terms in the map with X

# Karnaugh Terms (2)

- Finding the Terms
  - Example: even pips

n	a	b	c	$\varphi(a,b,c)$	
0	0	0	0	X	$x_0$
1	0	0	1	0	
2	0	1	0	1	$m_0$
3	0	1	1	0	
4	1	0	0	1	$m_1$
5	1	0	1	0	
6	1	1	0	1	$m_2$
7	1	1	1	X	$x_1$

- Minterms

- $m_0 = \neg a \wedge b \wedge \neg c$
- $m_1 = a \wedge \neg b \wedge \neg c$
- $m_2 = a \wedge b \wedge \neg c$

- Don't-care terms

- $x_0 = \neg a \wedge \neg b \wedge \neg c$
- $x_1 = a \wedge b \wedge c$

# Karnaugh Terms (3)

- Filling the Terms in

- Minterms

- $m_0 = \neg a \wedge b \wedge \neg c$


- $m_1 = a \wedge \neg b \wedge \neg c$

- $m_2 = a \wedge b \wedge \neg c$

- Don't-Care Terms

- $x_0 = \neg a \wedge \neg b \wedge \neg c$

- $x_1 = a \wedge b \wedge c$

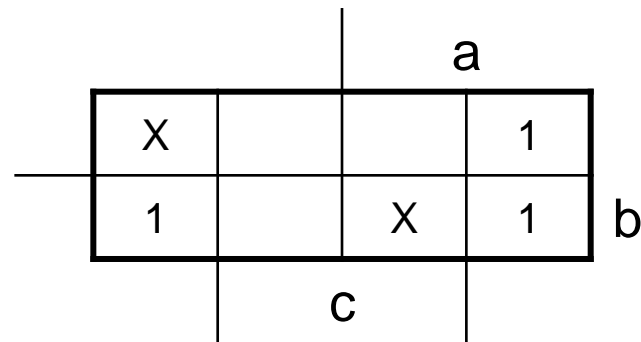

# Minimization (3)

- Finding the Blocks

- Minimise the minterms

- $(\neg a \wedge \neg b \wedge \neg c \wedge d)$ ,  $(\neg a \wedge \neg b \wedge c \wedge d)$ ,


- $(a \wedge \neg b \wedge c \wedge d)$ ,  $(a \wedge \neg b \wedge \neg c \wedge d)$ ,

- $(\neg a \wedge b \wedge \neg c \wedge d)$ ,  $(\neg a \wedge b \wedge c \wedge d)$ ,

- $(a \wedge b \wedge c \wedge d)$ ,  $(a \wedge b \wedge \neg c \wedge d)$

- Result

- $\varphi(a,b,c,d) = d$

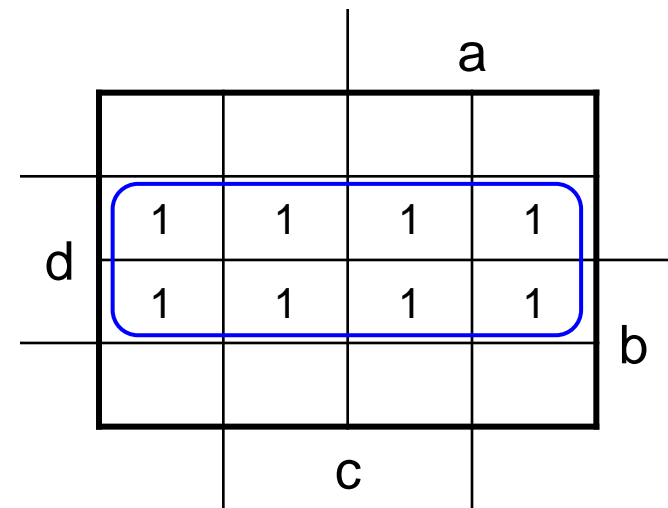

# Minimization (4)

- Finding the Blocks (continued)

- Minimise the minterms

- $(\neg a \wedge \neg b \wedge \neg c \wedge \neg d)$ ,  $(a \wedge \neg b \wedge \neg c \wedge \neg d)$ ,


- $(\neg a \wedge \neg b \wedge c \wedge d)$ ,  $(a \wedge \neg b \wedge c \wedge d)$ ,

- $(\neg a \wedge b \wedge c \wedge d)$ ,  $(a \wedge b \wedge c \wedge d)$ ,

- $(\neg a \wedge b \wedge \neg c \wedge \neg d)$ ,  $(a \wedge b \wedge \neg c \wedge \neg d)$

- Result

- $$\varphi(a,b,c,d) = (c \wedge d) \vee (\neg c \wedge \neg d)$$

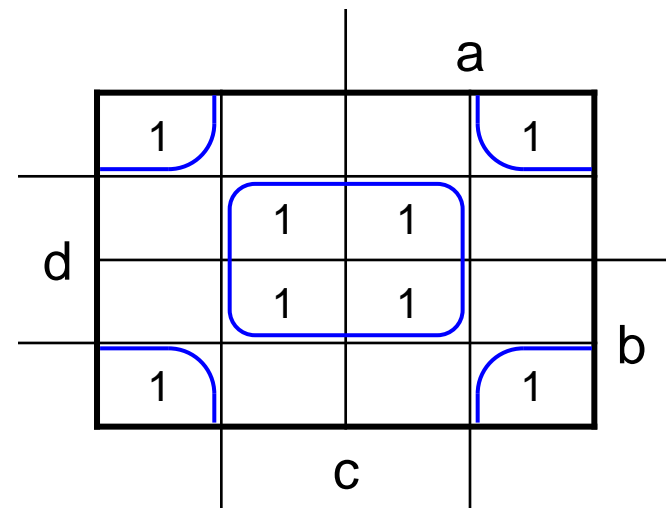

# Minimization (5)

- Finding the Blocks (continued)

- Minimise the minterms

- $(\neg a \wedge \neg b \wedge \neg c \wedge \neg d)$ ,  $(\neg a \wedge \neg b \wedge c \wedge \neg d)$ ,

- $(a \wedge \neg b \wedge c \wedge \neg d)$ ,  $(a \wedge \neg b \wedge \neg c \wedge \neg d)$ ,

- $(\neg a \wedge \neg b \wedge c \wedge d)$ ,  $(a \wedge \neg b \wedge c \wedge d)$ ,


- $(a \wedge b \wedge \neg c \wedge d)$ ,  $(\neg a \wedge b \wedge \neg c \wedge \neg d)$ ,

- $(\neg a \wedge b \wedge c \wedge \neg d)$ ,  $(a \wedge b \wedge c \wedge \neg d)$ ,

- $(a \wedge b \wedge \neg c \wedge \neg d)$

- Result

- $$\varphi(a,b,c,d) = \neg d \vee (\neg b \wedge c) \vee (a \wedge b \wedge \neg c)$$

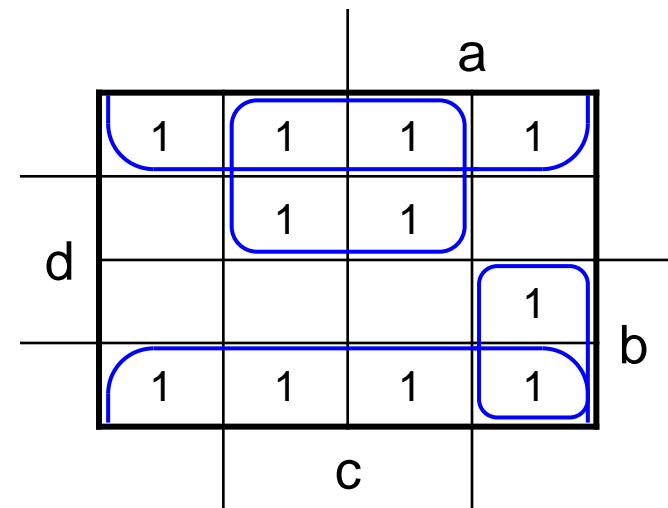

# Minimization (6)

- Finding the Blocks (finished)
  - Don't-care terms can help to find a better minimization.

